
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI



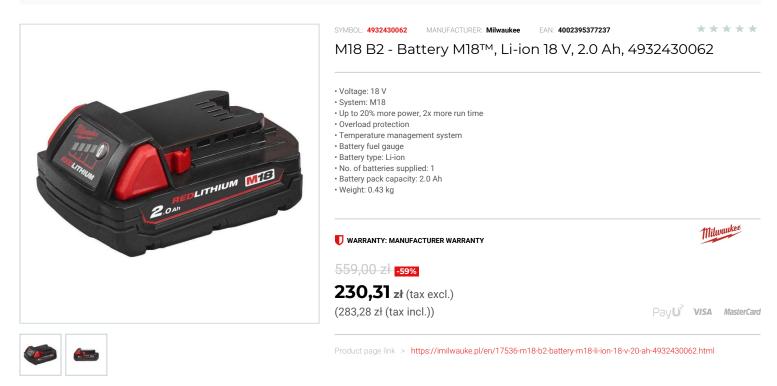

DESCRIPTION

- Charge time:
- Fast charger M12-18 FC: 26 min Standard charger M12-18C/ M12-18 AC/ M1418 C6: 40 min
- Sophisticated electronics: REDLINK[®] intelligence.
 Overload protection Prevents user from damaging their cordless power tool investment in abusive situations.
- Temperature management system Keeps battery in ideal temperature range to provide maximum life.
- Individual cell monitoring Ensures optimal charge and discharge for maximum life.
 Up to 2x more run time, 20% more power, and Up to 2x more recharges*.
- *Compared with other Lithium-Ion technologies and / or with previous MILWAUKEE® battery technology. Results depend on voltage, tool, and application.
- Integrated weld frame.

FEATURES

Symbol	M18B2
Napięcie akumulatora [V]	18
Pojemność akumulatora [Ah]	2.0
System	M18™
Typ akumulatora	Li-lon