


PARTNER W DOBORZE ROZWIĄZAŃ technicznych dla przemysłu i motoryzacji



 $\star \star \star \star \star$

Milwaukee

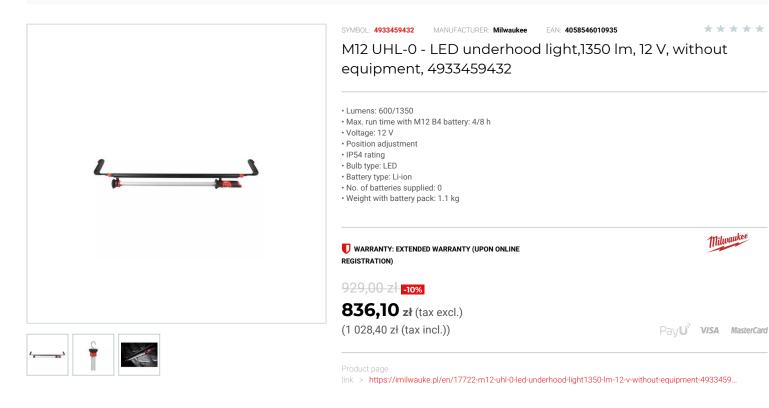

DESCRIPTION

• TRUEVIEW" high definition light output delivers consistent beam, optimised colour temperature and true representation of colours and detail.

- Two light output settings with 1350 and 600 Lumens to maximise run time and to explose the settings with 1350 and 600 Lumens to maximise run time and to optimise lighting output.
 M12^m 4.0 Ah battery provides 4 hours of run time in high and 8 hours of run time in low setting.
 Mounting hooks extend 119 cm 196 cm (47' 77') covering wide cars and trucks.
 Flexible and versatile light bar to rotate vertically, adjust position and remove from the carrier to suit user needs.

- Rubber gripping surface for maximum hold.
- FINISHGUARD™ hooks provide lasting protection against scratches to a vehicle's finish.
- Stainless hook allows to hang the light bar independently from the carrier.
- Impact and chemical resistant polycarbonate lens to withstand common automotive fluids.

- IP54 protected from dust and splashing water.
 Flexible battery system: works with all MILWAUKEE® M12[™] batteries.

· Supplied without battery and charger.

FEATURES

Symbol	M12UHL-0
Nazwa	lampa podwieszana LED
Waga [kg]	1.10
Stopień ochrony IP	IP 54
Jasność	600/1350 lm