


PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI



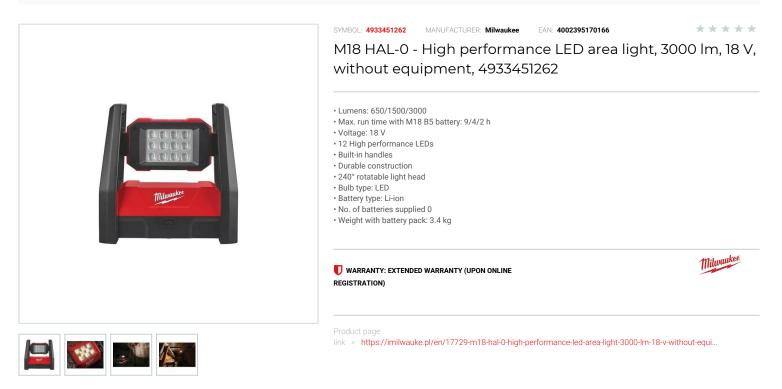

DESCRIPTION

• Twelve high performance LEDs and 3 light settings provide up to 3000 Lumens on high - up to 30% brighter than a 500 Watt halogen light.

240° rotative light head and integrated key holes for horizontal and vertical hanging.
Impact resistant polycarbonate lens and durable roll cage to protect the light from rough jobsite conditions.
Dual power source, powered by either M18° REDLITHIUM[®]-ION battery packs or by 2.5 m included extension cord.

· Easy one-handed transport with built-in carry handles.

· Low battery indicator, light flashes when battery pack is low on charge

Flexible battery system: works with all MILWAUKEE® M18[™] batteries.

Supplied without battery and charger.

FEATURES

Symbol	M18HAL-0
Nazwa	latarnia LED
Waga [kg]	3.40
Stopień ochrony IP	IP 54
Jasność	650/1500/3000 lm

