
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI



Impact wrenches, impact drivers > Impact wrenches

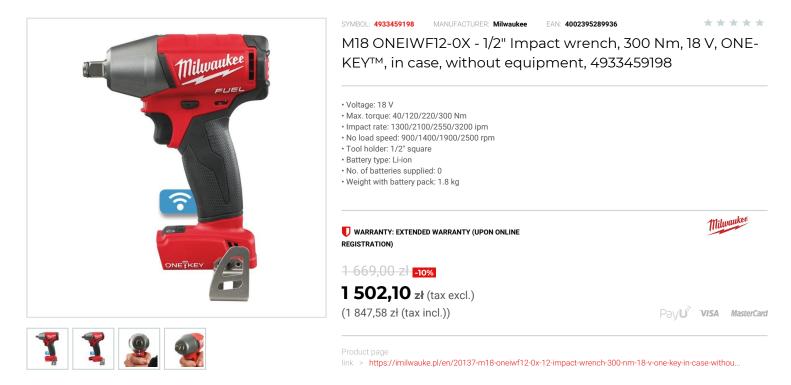

DESCRIPTION

- Sound power level measured: 104.5 dB(A)
- Sound pressure level: 93.5 dB(A)
 M18 FIWF12 but with ONE-KEY[™] technology.
- Connect via Bluetooth® with the ONE-KEY[™] app.
 Complete tool customisation via ONE-KEY[™] app to tune the tool to your needs.
- Control speed, torque, start and end speeds and LED.
- Configure to any application choosing optimum tool settings for repeatable precision.
- Program/save profiles for unmatched control.
- Select from a range of application profiles or quickly create your own for perfect results on every trigger pull.
 Save up to 4 custom settings to the tools memory for fast selection on the jobsite.
- ONE-KEY™ app also provides inventory function for total management of your complete tool/equipment fleet.
- 1/2" friction ring reception.
- Standard equipment: belt clip.
- Flexible battery system: works with all MILWAUKEE® M18[™] batteries.
- · Supplied in case (HD Box), without battery and charger.

FEATURES

Symbol	M180NEIWF12-0X
Wyjście	1/2"
Nm max	300
Częstość udaru [ud/min]	1300/2100/2550/3200
Ilość akumulatorów	brak
Zasilanie	battery
Napięcie akumulatora [V]	18
Obroty [obr/min]	900/1400/1900/2500