
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI



> Grinders and polishers > Angle grinders

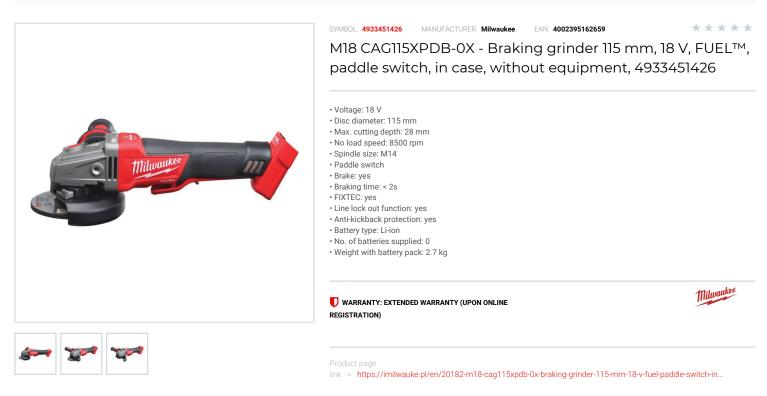

DESCRIPTION

- Vibration sanding: 1.83 m/s²
- Vibration at grinding metal: 2.11 m/s²
- Sound power level measured: 89.9 dB(A)
- Sound pressure level: 78.9 dB(A)
- Brushless POWERSTATE[™] motor with the power to grind and up to 10x more tool life.
- REDLINK PLUS[™] intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load. REDLITHIUM[™]-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- RAPIDSTOP[™] for fastest disc brake in less than 2 seconds and best user protection.
- Safety paddle switch with line-lock-out function to prevent automatic start up.
- Premium gearing system same system as used at high performance corded grinders
- Removable dust screen to prevent debris entrance, prolonging motor life.
- 115 mm keyless guard great cutting capacity and fast guard adjustment without using a spanner.
 FIXTEC[™] nut for tool-free disc change.
- Anti-vibration side handle for lower vibration

- Fuel gauge displays remaining charge.
 Flexible battery system: works with all MILWAUKEE® M18[™] batteries.
- Standard equipment: quick release safety guard, AVS side handle, flange, FIXTEC nut, 2x dust screens.
- · Supplied in case (HD Box) without battery and charger.

FEATURES

Symbol	M18CAG115XPDB-0X
Ilość akumulatorów	brak
Zasilanie	battery
Napięcie akumulatora [V]	18
Średnica tarczy	115.00
Typ włącznika	łopatkowy
Obroty [obr/min]	8500

