
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI



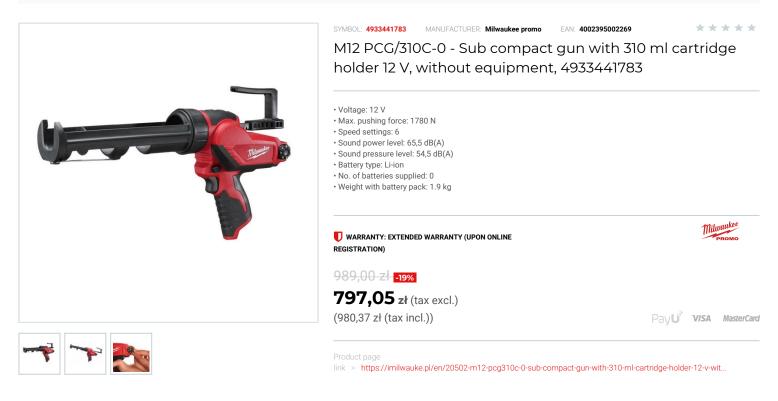

DESCRIPTION

• Up to 1780 N of force.

- REDLINK[™] overload protection electronics in tool and battery pack deliver best in class system durability.
 Optimised performance with all construction adhesives and cool temperatures.
- Anti-drip feature prevents unwanted dripping when trigger is released.
- Large robust plunger design ensures constant flow, reduces blow back and expels all sealant from cartridge
- Fuel gauge displays remaining charge.
- REDLITHIUM[™]-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life. Flexible battery system: works with all MILWAUKEE® M12[™] batteries.
- Standard equipment: 310 ml catridge holder
- · Supplied without battery and charger.

FEATURES

Symbol	M12PCG/310C-0
llość akumulatorów	brak
Zasilanie	battery
Napięcie akumulatora [V]	12