
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI



ories > Blades > Reciprocating saw blades

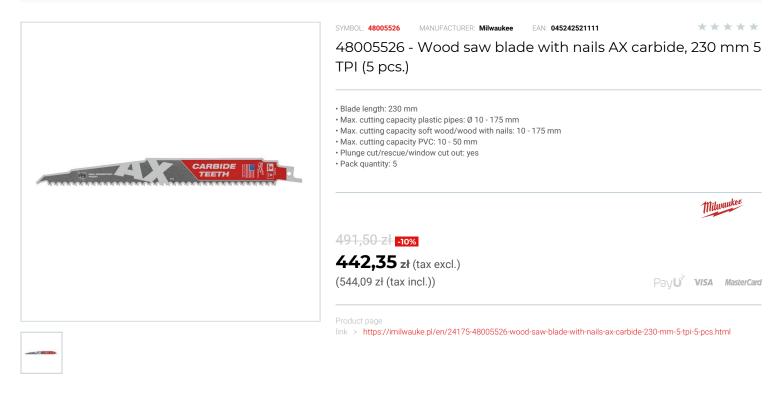

DESCRIPTION

- Up to 50 x longer life than standard Bi-Metal blades
- Carbide teeth deliver long life and extreme durability in the toughest applications.
   Cuts through harderned screws and fastners.
- Up to 2 x faster than standard Bi-Metal blades.
- A fast and aggressive 5 Tpi tooth pattern allows for the fastest cutting in nail embedded wood and a wide range of construction materials (wood/nails/bolts/screws/cast iron/asphalt roofing felt shingles).
- Up to 25% more cuts per charge vs. standard Bi-Metal blades. Optimised for use with cordless reciprocating saws.
   FANG TIP<sup>®</sup>: For faster plunge cutting and reaching into restricted areas.
- NAIL GUARD™: Protects the tooth during nail impacts for increased durability and lifetime · Sloped shape: Excellent for plunge cutting and reaching into restricted areas.
- Thick 1.27 mm robust blade body for precise straight cuts.
- 25 mm blade height for improved stability and minimum vibration.
  Best for wood / nails / hardened fastners demolition.

## FEATURES

Symbol	48005526
L [mm]	230.00
llość zębów na cal	5 TPI
Zastosowanie do materiału	drewno rozbiórkowe
llość elementów	5
Uchwyt	uniwersalny