
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI



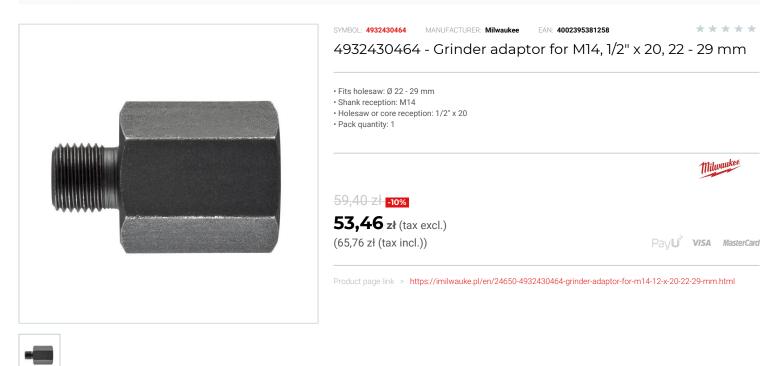

DESCRIPTION

How to use on an angle grinde

1. Screw the grinder adaptor M14 to the holesaw and tighten firmly with a spanner. Then apply the spindle lock on the angle

grinder and fit the adaptor directly onto the spindle; tighten firmly with a spanner. 2. If the tile is not fitted to a wall or floor ensure it is secured firmly with a clamp.

3. Dip the holesaw tips into water.

4. Switch on angle grinder to full speed. Slowly approach the tile with the holesaw at a 20-30° angle with light pressure to avoid skating on the tile. Once the holesaw starts to cut into the tile and forms a groove, gradually raise the holesaw so that it is horizontal with the tile.

5. Every 5 seconds dip the holesaw in water. Apply light pressure and an oscillating circular motion during cutting to maximise tool life.

FEATURES

Symbol	4932430464
Nazwa	adapter do szlifierki M14 1/2" x 20 do pił 22 - 29 mm