
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI



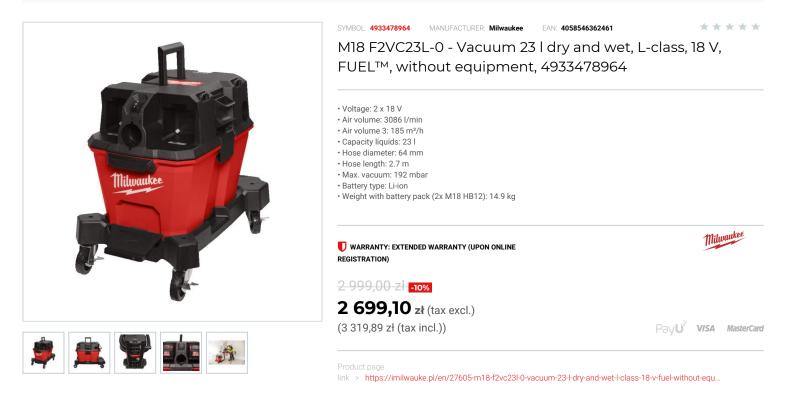

DESCRIPTION

- Sound power level (LWA): 92 dB(A)
- Sound pressure level (LPA): 78 dB(A) Vibration level: 2.5 m/s²
- Vibration ucertainty: 1.5 m/s²
- The M18 FUEL™ 23 litre L class Wet/Drv Vacuum brings outstanding performance, durability, and versatility to jobsite cleanup
- With a maximum air flow of 3086 l/min and 192 mbar this provides excellent performance for both wet and dry clean up applications.
- Max power Mode delivers up to 34 minutes of continuous cleaning time (up to 480 m²) and up to 49 minutes (up to 545 m²) on Max run time Mode per charge on (2) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] 12.0 Ah battery packs.
- The highly efficient HEPA H13 filter collects 99.97 % of airborne particles down to 0.3 microns
- The anti static 2.7 m long, crush and twist-resistant hose construction delivers extended hose life.
- On board storage for all attachments including floor clean up kit and powertool attachments.
 Robust removable trolley with lockable wheels allows easy transportation and movement around the jobsite.
- The DEK 26 power tool connector allows for efficient dust extraction from power tools The DNA of our FUEL[™] platform redefines the balance of cordless technologies.
- MILWAUKEE®'s POWERSTATE" brushless motor, REDLITHIUM" battery pack and REDLINK PLUS" electronic intelligence delivering outstanding power, run time and durability.
- Flexible battery system: works with all MILWAUKEE® M18[™] batteries.
 Standard Equipment: Flexible hose, Crevice tool, Floor utility nozzle, 2 : ent: Flexible hose, Crevice tool, Floor utility nozzle, 2 x Extension wands, Curved handle, Tool adapter, Fleece bag.
- · Supplied without battery and charger.

FEATURES

Symbol	M18F2VC23L-0
Ilość akumulatorów	brak
Zasilanie	battery
Napięcie akumulatora [V]	18
Podciśnienie	192.00